


E-Fill Electric

Smart and Connected

EVC Total Solutions Co.

Master Franchiser



Looking for charging solutions?

LET'S STEP IN!



Get in touch today!

evctotal.solutions@gmail.com 

efillelectric.com 

9910278815 


OUR, PLUG AND CHARGE SERIES!

X1



Phase	1 Phase (L1, N, PE)
Operating Temperature	-35°C to 65°C
Connector Type	IEC 62196-2 (Type 2)
AC Power Input Rating	230V, AC Level 2
Max Power Output Rating	7.4 kW
HMI Interface	LED Indicators
Internet Connectivity	Wifi/GSM (Optional)
User Authentication	RFID, Mobile App, QR Code
OCPP Protocol	OCPP 1.6J
Dimension (HWD)	310*220*95 mm
Weight	6 Kg
Cable Length (Gun)	5m
IP Rating	IP 65

OUR, PLUG AND CHARGE SERIES!




X2




	7kW	11kW	22kW
Phase	1 Phase (L1, N, PE)	3P(L1, L2, L3, N, PE)	3P(L1, L2, L3, N, PE)
Operating Temperature	-35°C to 65°C	-35°C to 65°C	-35°C to 65°C
Connector Type	IEC 62196-2 (Type 2)	IEC 62196-2 (Type 2)	IEC 62196-2 (Type 2)
AC Power Input Rating	230V, AC Level 2	415V, AC Level 2	415V, AC Level 2
Max Power Output Rating	7.4 kW	11 kW	22 kW
HMI Display	TFT LCD Touch Screen Display	TFT LCD Touch Screen Display	TFT LCD Touch Screen Display
Internet Connectivity	GSM + Wifi/Ethernet (Optional)	GSM + Wifi/Ethernet (Optional)	GSM + Wifi/Ethernet (Optional)
User Authentication	RFID, Mobile App, QR Code	RFID, Mobile App, QR Code	RFID, Mobile App, QR Code
OCPP Protocol	OCPP 1.6J	OCPP 1.6J	OCPP 1.6J
Dimension (HWD)	470*280*165 mm	470*280*165 mm	470*280*165 mm
Weight	9.5 kg Aprox	9.5 kg Aprox	9.5 kg Aprox
Cable Length (Gun)	5m	5m	5m
IP Rating	IP 65	IP 65	IP 65

Phase	3 Phase(L1, L2, L3, N, PE)
Operating Temperature	-35°~65°C
Connector Type	16A Industrial or Domestic Socket
Input Voltage	415VAC ± 10%
Number of Outputs	3 Sockets
Output Power Rating	3.3kW (Per Single Socket)
Internet Connectivity	GSM + Ethernet
User Authentication	Mobile App, RFID,QR Code
OCPP Protocol	OCPP 1.6J
Dimension	520*360*170 mm
Weight	14 kg
Cable Length	N/A
IP Rating	IP 54

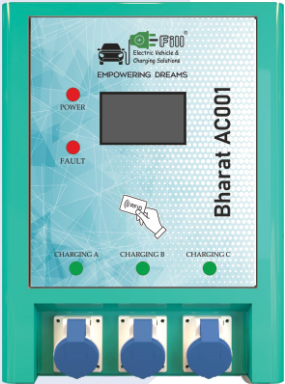

X0
AC Charger

Smart Plug	
Phase	Single phase
Operating Temperature	-35°~65°C
Connector Type	16A Industrial or Domestic Socket
Input Voltage	230VAC ± 10%
Output Power Rating	3.3 kW
HMI Display	Display with Keypad
Internet Connectivity	GSM + Ethernet
User Authentication	RFID, Mobile App, OTP
OCPP Protocol	OCPP 1.6J
Dimension (HWD)	345*230*140 mm
Weight	7 kG
Cable Length	N/A
IP Rating	IP 55

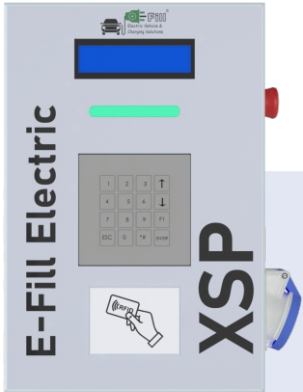

XSP
LEV Charger

X3 - Fast Charger

Connector Type	–	CCS2
Power Rating	–	30 kW
Operating Temperature	–	-25°C to 50°C
Input Power	–	90kVA, 415VAC ± 10%, L1, L2, L3, N, PE
Output Voltage / Current	–	200 - 1000VDC, 0 - 100A
OCPP Protocol	–	OCPP 1.6J
User Authentication	–	Mobile App, RFID and QR Code
Weight	–	52 kg
Dimensions (H*W*D)	–	665*470*190 mm
Cable Length	–	5 m
HMI Display	–	4.3 inch Touch Screen Display
IP Rating	–	IP 54
Internet Connectivity	–	GSM,Ethernet, Wifi


X3

Fast Charger



X4 - Fast Charger

Connector Type	-	Dual CCS2 Connector
Power Rating	-	60 kW
Operating Temperature	-	-25°C to 50°C
Input Power	-	90kVA, 415VAC $\pm$ 10%, L1, L2, L3, N, PE
Output Voltage / Current	-	200 - 1000VDC, 0 - 200A
OCPP Protocol	-	OCPP 1.6J
User Authentication	-	Mobile App, RFID and QR Code
Weight	-	170 kg
Dimensions (H*W*D)	-	1300*770*300 mm
Cable Length	-	5 m
HMI Display	-	7 inch Touch Screen Display
IP Rating	-	IP 54
Internet Connectivity	-	GSM,Ethernet, Wifi

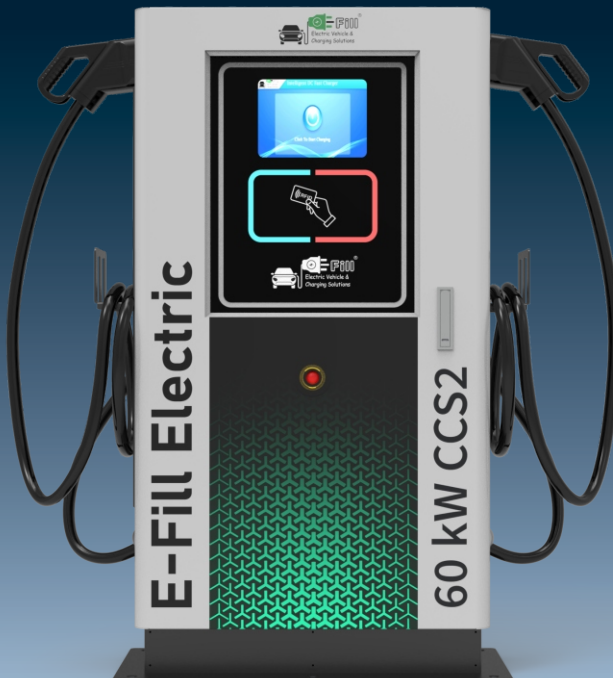


X4

Fast Charger

X5 - Fast Charger

Connector Type	–	Dual CCS2 Connector
Power Rating	–	120 kW
Operating Temperature	–	-25°C to 50°C
Internet Connectivity	–	GSM, Ethernet, Wifi
Output Voltage/Current	–	200 -1000VDC, 0 -350A
OCPP Protocol	–	OCPP 1.6 J
User Authentication	–	RFID, Mobile App
Weight	–	360kg
Dimensions (HWD)	–	1750*770*585 mm
Cable Length	–	5 m
HMI Display	–	7" inches with 720 x 480 pixels
IP Rating	–	IP 54
Input Power	–	90KVA, 415VAC $\pm$ 10% L1, L2, L3, N, PE



X5


Fast Charger





Electric Vehicle &
Charging Solutions

E-Fill Electric

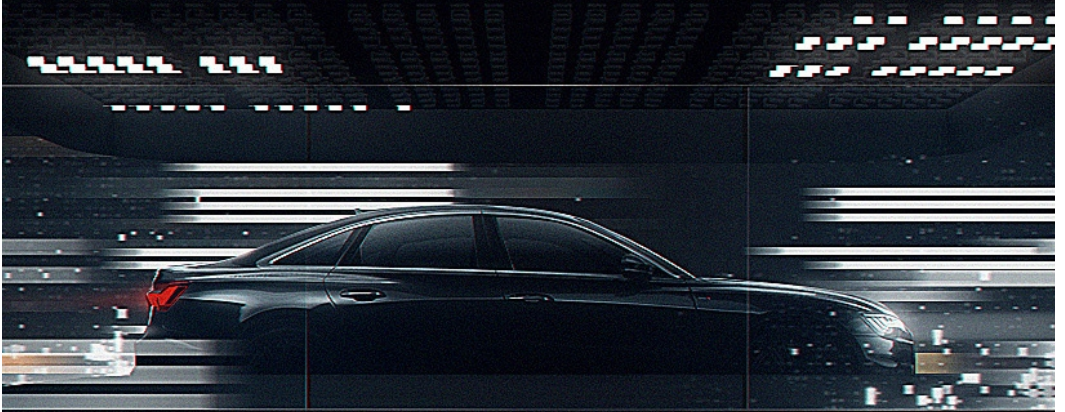

Empowering Dreams

Got any doubts?

Connect with us today!



E-Fill Electric



@EFill_Electric



efill.electric



E-Fill.Electric

EVC Total Solutions Co.



1009, Officer City, Raj Nagar Extn.,
Ghaziabad (U.P.)



+91-99102 78815



evctotalsolutions@gmail.com